

# M632

multifunction printer

## b e n e f i t s

### Product Overview

The RISO M632 is a high performance MFP that will fulfill the document processing requirements of medium to large workgroups. Documents are printed quickly and easily with the M632's 40 page-per-minute print engine. This versatile MFP includes standard faxing and color scanning and can be easily upgraded with optional duplexing and finishing functions.


- Up to 40 ppm letter, 38 ppm A4
- Time to first page: 10.5 seconds
- 350 MHZ processor
- 64 MB RAM standard
- Network standard
- Single pass duplex scanner

### Network Proven

Like all Lexmark business-class printers, the RISO M632 MFP is network proven with unsurpassed compatibility and reliability. The M632 features standard 10/100BaseTX Ethernet to provide easy network connections and high performance throughput, as well as broad downstream and network protocol support to ensure compatibility with existing systems.

### Increased Productivity

The RISO M632 MFP is also compatible with the optional RISO Document Solutions Suite. This suite offers solutions that can work together to offer powerful, flexible implementation of electronic forms creation, document capture, electronic distribution, and on-demand document retrieval. Robust routing, indexing and archiving capabilities are also available and can be achieved with one-touch simplicity and accuracy.

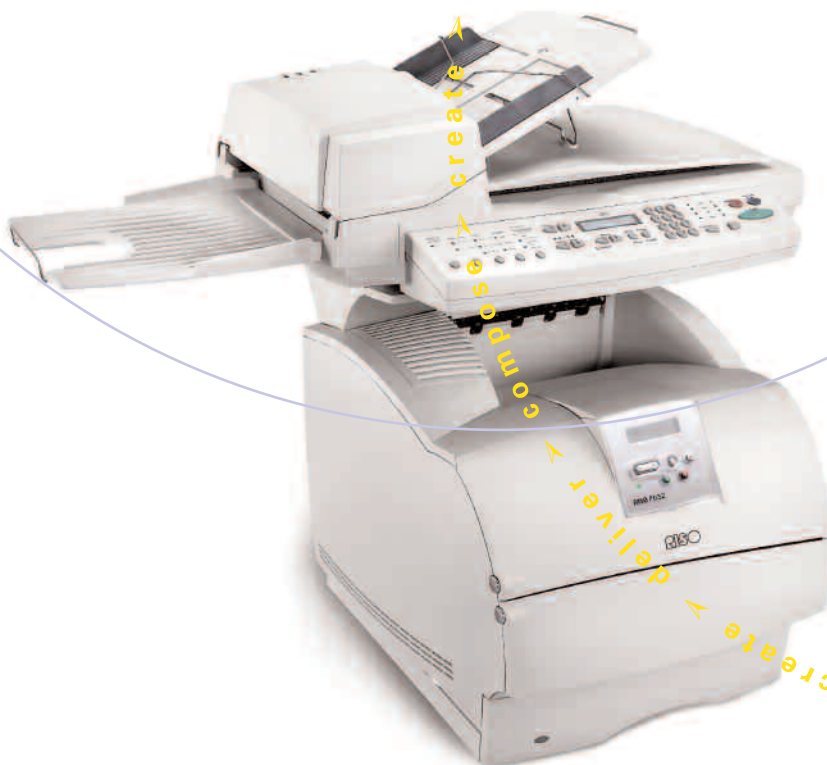

## Supported Operating Systems

### Apple

- Apple Mac OS 8.6 - 9.x
- Apple Mac OS X

### Microsoft Windows

- Microsoft Windows 2000 (Professional/Server/Advanced Server)
- Microsoft Windows 95 4.00.950 or later
- Microsoft Windows 98 (2nd edition)
- Microsoft Windows Me
- Microsoft Windows NT (4.00/4.00 Server)
- Microsoft Windows XP (Home, Professional)

### Citrix MetaFrame

- Microsoft Windows 2000 Server Terminal Services, with Citrix MetaFrame 1.8 or XP 1.0
- Microsoft Windows NT 4.0 Terminal Server, with Citrix® MetaFrame® 1.8 or XP 1.0

Citrix, MetaFrame and MetaFrame XP are registered trademarks or trademarks of Citrix Systems, Inc. in the U.S. and other countries.

### Linux

- Red Hat Linux 7.2, 7.3, 8.0
- SuSE 7.2, 7.3, 8.0 Linux

### UNIX

- Certified Solaris Ready by Sun Microsystems
- Compaq (Digital) UNIX 4.0D
- Compaq Tru64 UNIX 4.0F, 5.1
- HP-UX 10.20, 11.00
- IBM AIX 4.2.1, 4.3.3, 5.1
- SCO OpenServer 5.0.4, 5.0.5, 5.0.6
- SGI IRIX 6.5.x
- Sun Solaris 2.6, 7, 8, 9
- Sun Solaris x86 2.6, 7, 8
- (SCO) UnixWare 2.1.3, 7.1, 7.1.1

### Novell

- Novell Netware Enterprise Print Services (NEPS) with Lexmark NDPS IP Gateway
- Novell NetWare® 3.x, 4.x, 5.x, 6.x including full NDS and NDPS support
- Novell® Distributed Print Services™ (NDPS™) 2.0 or later with Lexmark NDPS IP Gateway

### Other

- IBM iSeries or IBM AS/400® Systems with TCP/IP with OS/400® V3R1 or later using OS/400 Host Print Transform
- Virtually any platform supporting TCP/IP



### RISO, Inc.

300 Rosewood Drive  
Danvers, MA 01923  
Tel: 800-876-RISO (ext. 501)  
www.riso.com

©Copyright 2003 RISO, Inc. All rights reserved. No part of this document may be reproduced without permission of RISO, Inc. All products are trademarks of their respective companies. Specifications subject to change without notice.

Printed in USA

# s p e c i f i c a t i o n s

<b>Function</b>	Copying, Faxing, Printing, Color Network Scanning
<b>Print Resolution (black)</b>	1200 x 1200 dpi, 1200 Image Quality, 600 x 600 dpi
<b>Print Speed</b>	Letter, black: Up to 40 pages per minute A4, black: Up to 38 pages per minute
<b>Time to First Page (black)</b>	<10 seconds
<b>Copy Speed</b>	Letter, black: Up to 40 pages per minute A4, black: Up to 38 pages per minute
<b>First Copy Out Time (mono)</b>	10.5 seconds
<b>Scan Resolution</b>	600 x 600 dpi
<b>Scan Speed (letter/A4)</b>	Black: Up to 23 pages per minute; Color: Up to 14 pages per minute
<b>Processor</b>	350 MHz
<b>Memory MFP</b>	Standard: 64 MB; Maximum: 320 MB
<b>Modem Speed</b>	33.6 Kbps
<b>Scan Area</b>	Maximum: 8.5 x 14 inches (216 x 355 mm)
<b>ADF Original Input Capacity</b>	Up to 50 pages 20 lb or 75 gsm bond
<b>ADF Media Weight</b>	Maximum: 32 lbs. (120 gsm)
<b>Reduce/Enlarge Range</b>	50 to 200 %
<b>Fax Server Integration</b>	Biscom FAXCOM, Equisys ZetaFax, Omtool Fax Sr., Captaris RightFax
<b>Scan to File</b>	Scan to FTP server, e-mail, PC
<b>Document Scanning &amp; Distribution</b>	RISO Document Solutions Suite
<b>Standard Ports</b>	USB, Centronics IEEE 1284 Bidirectional Parallel, Ethernet 10/100BaseTX
<b>Optional Network Ports</b>	External 802.11b Wireless
<b>Network Connectivity</b>	Using Standard Ethernet or MarkNet Print Server
<b>Paper Handling Configuration (Standard)</b>	100-Sheet Multipurpose Feeder, 500-Sheet Input Tray, 500-Sheet Output Bin
<b>Paper Handling Configuration (Optional)</b>	500-Sheet Drawer, 250-Sheet Drawer, 2,000-Sheet Drawer, 500-Sheet Duplex Unit, Envelope Feeder. Optional furniture required.
<b>Paper Input Capacity</b>	Standard: 600 pages 20 lb or 75 gsm bond Maximum: 2600 pages 20 lb or 75 gsm bond
<b>Paper Output Capacity</b>	Standard: 500 pages 20 lb or 75 gsm bond
<b>Size (H x W x D)</b>	MFP bundle: 27.5 x 22.4 x 24" (699 x 569 x 610 mm)
<b>Weight</b>	MFP bundle: 59.2 lbs. (26.9 Kg)
<b>Noise Levels</b>	Idle: 38 dBA; Copying: 58 dBA; Printing: 53 dBA; Scanning: 50 dBA
<b>Engine Duty Cycle</b>	Maximum: 200,000 pages per month
<b>Scanner Duty Cycle</b>	Maximum: 10,000 pages per month
<b>Certifications</b>	FCC Class A, UL 60950, CSA, ICES Class A, CS03, IEC 320-1

# M632

multifunction printer



Item #MC8198